
## Friulinox



### Model: CMV21A

### Vanilla

CABINET PASTRY LINE / ICE CREAM LINE - SERIE VANILLA MULTIRANGE - TEMP. -25 / +18 °C - 20 X EN2. AIR CONDENSING UNIT

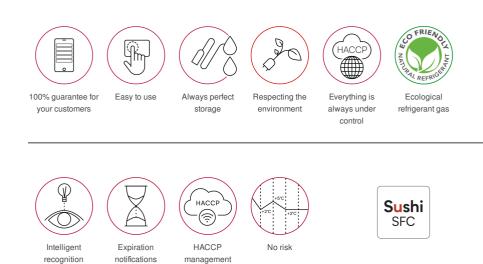



# Friulinox

#### COMMANDS, CONTROLS AND SAFETY DEVICES

- HACCP alarm management.
- Specific probe for humidity regulation.
- Connectivity with Wi-Fi remote control.
- Product management app for Sushi SFC conservation.
- 2.8" captive color display with control interface.
- Smart Freshness Control. It is a truly exclusive and intelligent virtual assistant that supervises the freshness and quality of stored products.

#### SUSHI FRESHNESS CONTROL

- Intelligent recognition. Immediate identification of products and their characteristics via barcodes.
- Expiration notifications. Zero waste with no more expired products
- HACCP management. Accurate and punctual daily notifications for HACCP records.
- No risk. Manage the freshness of your artisan products through expiration notifications.

- Sushi Smart Freshness Control was created as a result of fifty years of experience in food preservation systems. It is a truly exclusive and intelligent virtual assistant that supervises the freshness and quality of stored products. The Sushi App, thanks to the standard WI-FI connection in all Vanilla storage cabinets, monitors and keeps product expiration dates under control. It also notifies you when they are close to expiring so that you can avoid useless and expensive waste. For packaged products, you can upload the products directly in Vanilla by using the barcode or, in the case of artisan products, you can enter the products manually. When products are about to expire, or are already expired, Sushi sends you a notification directly to your smart phone. Vanilla automatically signals the presence of expired products with a red hat and the presence of products close to expiration with an orange hat. With this exclusive innovation, Vanilla achieves to be the technology market leader for pastry storage cabinets.

#### STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- Internal stainless steel.
- External Scotch Brite satin finish stainless steel.
- 80 mm-thick insulation.
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Ergonomic stainless steel handle.
- Self-closing doors with opening position block at 100° and magnetic gaskets on all 4 sides.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Rounded cell corners for easy cleaning.
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.
- Integrated LED lighting on the dashboard.
- Locking fixtures.

#### REFRIGERANT GROUP

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43°C).
- Climate class 5.
- R290 ecological refrigerant gas

#### STANDARD EQUIPMENT

WI-FI: WI-FI CONNECTION 20-CGL: N. 20 COUPLE OF L-SHAPED SLIDES IOTK: CONNECTIVITY KIT

#### OPTIONAL TO BE REQUESTED WHEN ORDERING

TS-AVPG: AC 208/230 V - 60 HZ SKRT-AVPG: WHEEL KIT WITH BRAKE SCGL-EN2-730: "L" SLIDES PAIR - EN2 - L=730 - AISI 304 SZC-EN2: CLOSING PLINTH SRI-ICE2: STAINLESS STEEL SHELF, COMPLETE WITH "C" GUIDES SK-ICEVM: Ice cream kit - n. 5 pair of C-shaped guides and n.5 Stainless steel shelfs


#### EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

IOTC-1: COLDCLOUD CONNECTION FEE - 1 YEAR IOTC-3: COLDCLOUD CONNECTION FEE - 3 YEARS CGL-EN2-730: "L" SLIDES PAIR - EN2 - L=730 - AISI 304 KRT-AVPG: WHEEL KIT WITH BRAKE ZC-EN2: CLOSING PLINTH RI-ICE2: STAINLESS STEEL SHELF, COMPLETE WITH "C" GUIDES K-ICEVM: Ice cream kit - n. 5 pair of C-shaped guides and n.5 Stainless steel shelfs

DIMENSIONS		
Width	mm	780
Depth	mm	1080
Height	mm	2090
Door Span Width	mm	620
Internal Depth	mm	835
Door Span Height	mm	1442
Package width	mm	820
Package depth	mm	1120
Package height	mm	2240
Package volume	m3	2,06
TECHNICAL DATA		
Working temperature	°C	-25/+18
Climate class		Classe 5
Refrigerant - Type		R290
CAPACITY		
Volume utile	lt	644.4
Capacity		20 x EN2
POWER SUPPLY		
Max electric power	kW	2,142
Cooling power	kW	0,687
Max consumption	А	10,3
Power supply voltage	V	230
		1
Electrical_Phase		

\* TN - Evap. temp. -10°C / Cond. temp. +45°C || BT - Evap. temp. -25°C / Cond. temp. +45°C.

# Friulinox

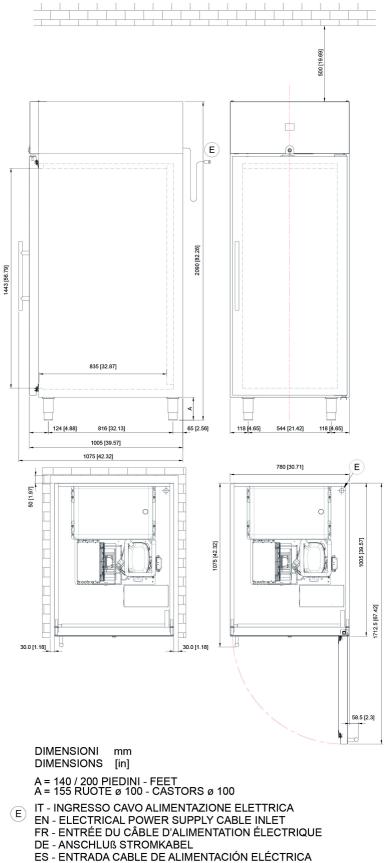

RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ

30/5/2023