




Dedicated app:
Sushi Freshness Control

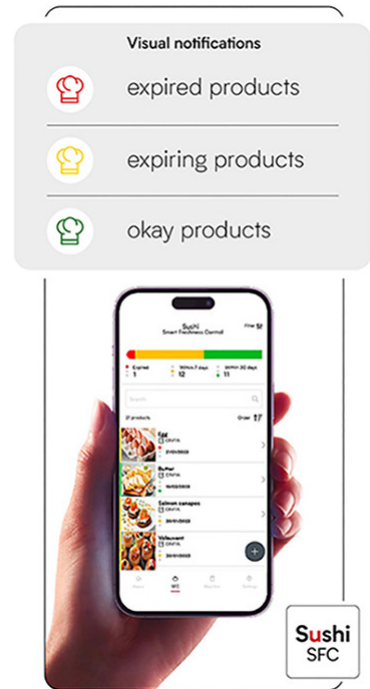

Model: **CRV21A**

Vanilla

CABINET PASTRY LINE - SERIE VANILLA - TEMP. -2 / +18 °C - 20 X EN2. AIR CONDENSING UNIT



100% guarantee for your customers



Easy to use



Always perfect storage



Respecting the environment



Everything is always under control



Ecological refrigerant gas




Intelligent recognition



Expiration notifications



HACCP management



No risk



COMMANDS, CONTROLS AND SAFETY DEVICES

- HACCP alarm management.
- Specific probe for humidity regulation.
- Connectivity with Wi-Fi remote control.
- Product management app for Sushi SFC conservation.
- 2.8" captive color display with control interface.
- Smart Freshness Control. It is a truly exclusive and intelligent virtual assistant that supervises the freshness and quality of stored products.

SUSHI FRESHNESS CONTROL

- **Intelligent recognition.** Immediate identification of products and their characteristics via barcodes.
- **Expiration notifications.** Zero waste with no more expired products
- **HACCP management.** Accurate and punctual daily notifications for HACCP records.
- **No risk.** Manage the freshness of your artisan products through expiration notifications.
- *Sushi Smart Freshness Control was created as a result of fifty years of experience in food preservation systems. It is a truly exclusive and intelligent virtual assistant that supervises the freshness and quality of stored products. The Sushi App, thanks to the standard WI-FI connection in all Vanilla storage cabinets, monitors and keeps product expiration dates under control. It also notifies you when they are close to expiring so that you can avoid useless and expensive waste. For packaged products, you can upload the products directly in Vanilla by using the barcode or, in the case of artisan products, you can enter the products manually. When products are about to expire, or are already expired, Sushi sends you a notification directly to your smart phone. Vanilla automatically signals the presence of expired products with a red hat and the presence of products close to expiration with an orange hat. With this exclusive innovation, Vanilla achieves to be the technology market leader for pastry storage cabinets.*

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- Internal stainless steel.
- External Scotch Brite satin finish stainless steel.
- 80 mm-thick insulation.
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Ergonomic stainless steel handle.
- Self-closing doors with opening position block at 100° and magnetic gaskets on all 4 sides.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Rounded cell corners for easy cleaning.
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.
- Integrated LED lighting on the dashboard.
- Locking fixtures.

REFRIGERANT GROUP

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43 °C).
- Climate class 5.
- R290 ecological refrigerant gas

STANDARD EQUIPMENT

WI-FI: WI-FI CONNECTION
20-CGL: N. 20 COUPLE OF L-SHAPED SLIDES
IOTK: CONNECTIVITY KIT

OPTIONAL TO BE REQUESTED WHEN ORDERING

TS-AVPG: AC 208/230 V - 60 HZ
SKRT-AVPG: WHEEL KIT WITH BRAKE
SCGL-EN2-730: "L" SLIDES PAIR - EN2 - L=730 - AISI 304
SZC-EN2: CLOSING PLINTH

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

CGL-EN2-730: "L" SLIDES PAIR - EN2 - L=730 - AISI 304

IOTC-3: COLD CLOUD CONNECTION FEE - 3 YEARS

IOTC-1: COLD CLOUD CONNECTION FEE - 1 YEAR

KRT-AVPG: WHEEL KIT WITH BRAKE

ZC-EN2: CLOSING PLINTH

DIMENSIONS

Width	mm	780
Depth	mm	1080
Height	mm	2090
Door Span Width	mm	620
Internal Depth	mm	835
Door Span Height	mm	1442
Package width	mm	820
Package depth	mm	1120
Package height	mm	2240
Package volume	m3	2,06
Weight	Kg	235
Weight with package	Kg	245

TECHNICAL DATA

Working temperature	°C	-2/+18
Motor		Air condensing unit
Climate class		Classe 5
Energy class		C
GWP - Global Warming Potential		3
Refrigerant - Type		R290
Refrigerant - Quantity	g	115

CAPACITY

Volume utile	lt	644.4
Capacity		20 x EN2

POWER SUPPLY

Max electric power	kW	1,297
Cooling power	kW	0,492
Max consumption	A	6,3
Power supply voltage	V	230
Electrical_Phase		1
Frequency	Hz	50

F.R.C. CRV21A

ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ
ENERGIJA · ENERGY · ENERGIE
ENERGI

657
kWh/annum


644 L

0 L

5
40°C-40%

2015/1094-IV

* TN - Evap. temp. -10°C / Cond. temp. +45°C || BT - Evap. temp. -25°C / Cond. temp. +45°C.

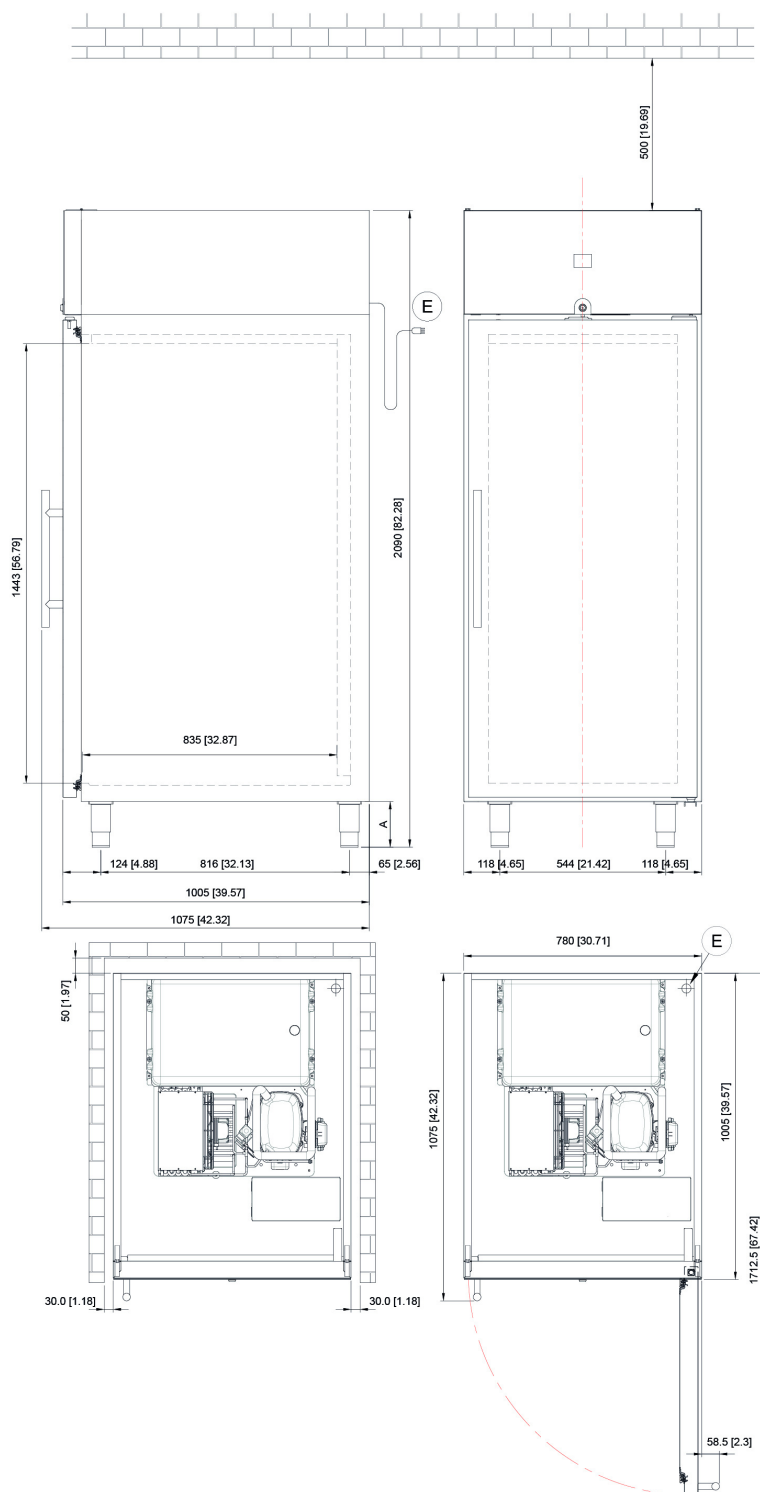

DIMENSIONI mm
DIMENSIONS [in]

A = 140 / 200 PIEDINI - FEET
A = 155 RUOTE \varnothing 100 - CASTORS \varnothing 100

- Ⓔ IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
EN - ELECTRICAL POWER SUPPLY CABLE INLET
FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
DE - ANSCHLUß STROMKABEL
ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ